Installation Instructions
Snap 3/16" Glass Glazing Vinyl
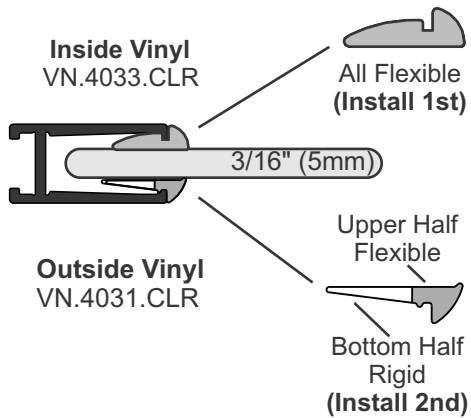## Models starting with: B, C, D, S, V and F
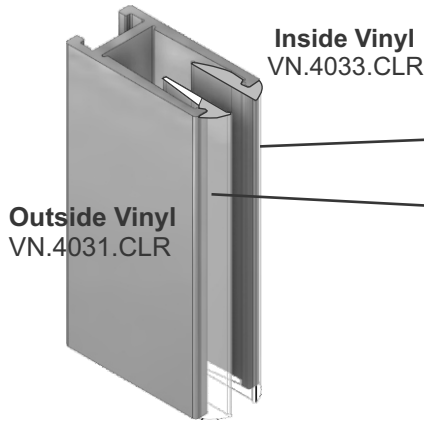
Building Partners through Glass
HARTUNG GLASS INDUSTRIES

P/N MM.4031

Standard Glazing For: 3/16" glass sidelite panels

New Snap Glazing Vinyls
(for posts and sills)

Inside Vinyl
VN.4033.CLR

All Flexible
(Install 1st)

3/16" (5mm)

Outside Vinyl
VN.4031.CLR

Upper Half
Flexible

Bottom Half
Rigid
(Install 2nd)

Used on vertical wall channels,
angled posts and sills

Inside Vinyl
VN.4033.CLR

Outside Vinyl
VN.4031.CLR

Header / Curb Glazing Vinyl
**(same vinyl, new clear color
for 1171 curb and header)**

Header

**Same inside
& out**
VN.4026.CLR

3/16" (5mm)

VN.4026.CLR

Curb
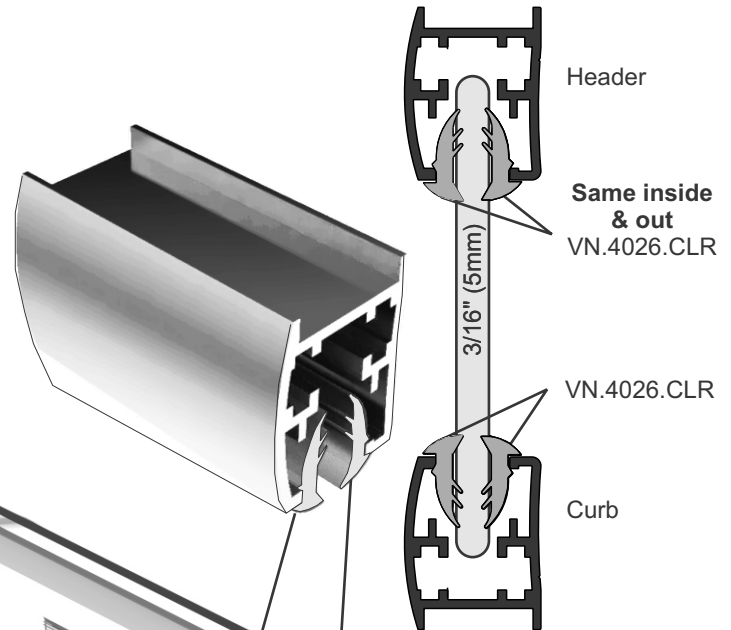
1st - Inside Vinyl
Install 1st and
push-in all the way

Use a block
of wood to
set the vinyl
in place

3/16" (5mm)

2nd -
Outside Vinyl
Push in with finger tip, finish with block of wood

Installation Instructions
Optional*: 1/4" Glass Glazing Vinyl
Models starting with: B, C, D, S, V and F with 1/4" glass*

*Check your glass thickness first! Most glass is 3/16". Read opposite page.

Standard Glazing For: 1/4" glass sidelite panels

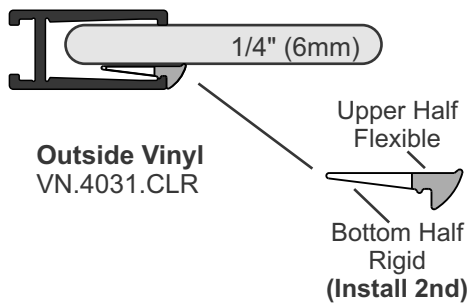## New Snap Glazing Vinyls
(for posts and sills)

Silicone Inside (final step)

1/4" (6mm)

Outside Vinyl
VN.4031.CLR

Upper Half Flexible

Bottom Half Rigid
(Install 2nd)

Used on vertical wall channels, angled posts and sills

Outside Vinyl
VN.4031.CLR

Header / Curb Glazing Vinyl
(same vinyl, new clear color for 1171 curb and header)

Header

Same inside & out
VN.4026.CLR

1/4" (6mm)

VN.4026.CLR

Curb
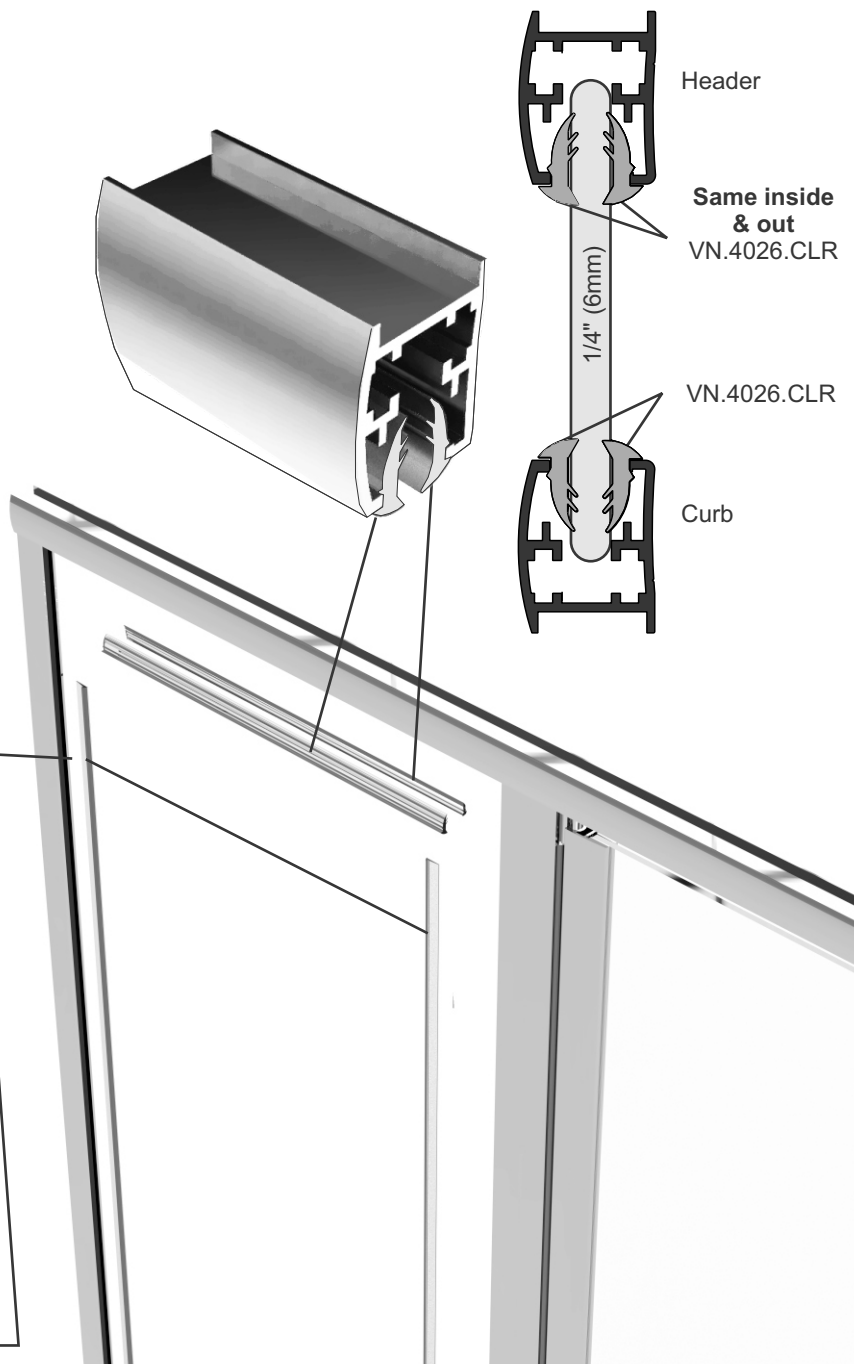
2nd - Silicone Inside
Last step of installation

1/4" (6mm)

Use a block of wood to set the vinyl in place

1st -
Outside Vinyl
Push in with finger tip, finish with block of wood